

TOWNSHIP OF HURON-KINLOSS (RIPLEY)

HURON AND QUEEN STREET SIDEWALKS


PROJECT No. 19153 CONTRACT No. 2

DRAWING No.

1
2

STREET

HURON STREET SIDEWALKS (PART 1)
QUEEN STREET SIDEWALKS (PART 2)

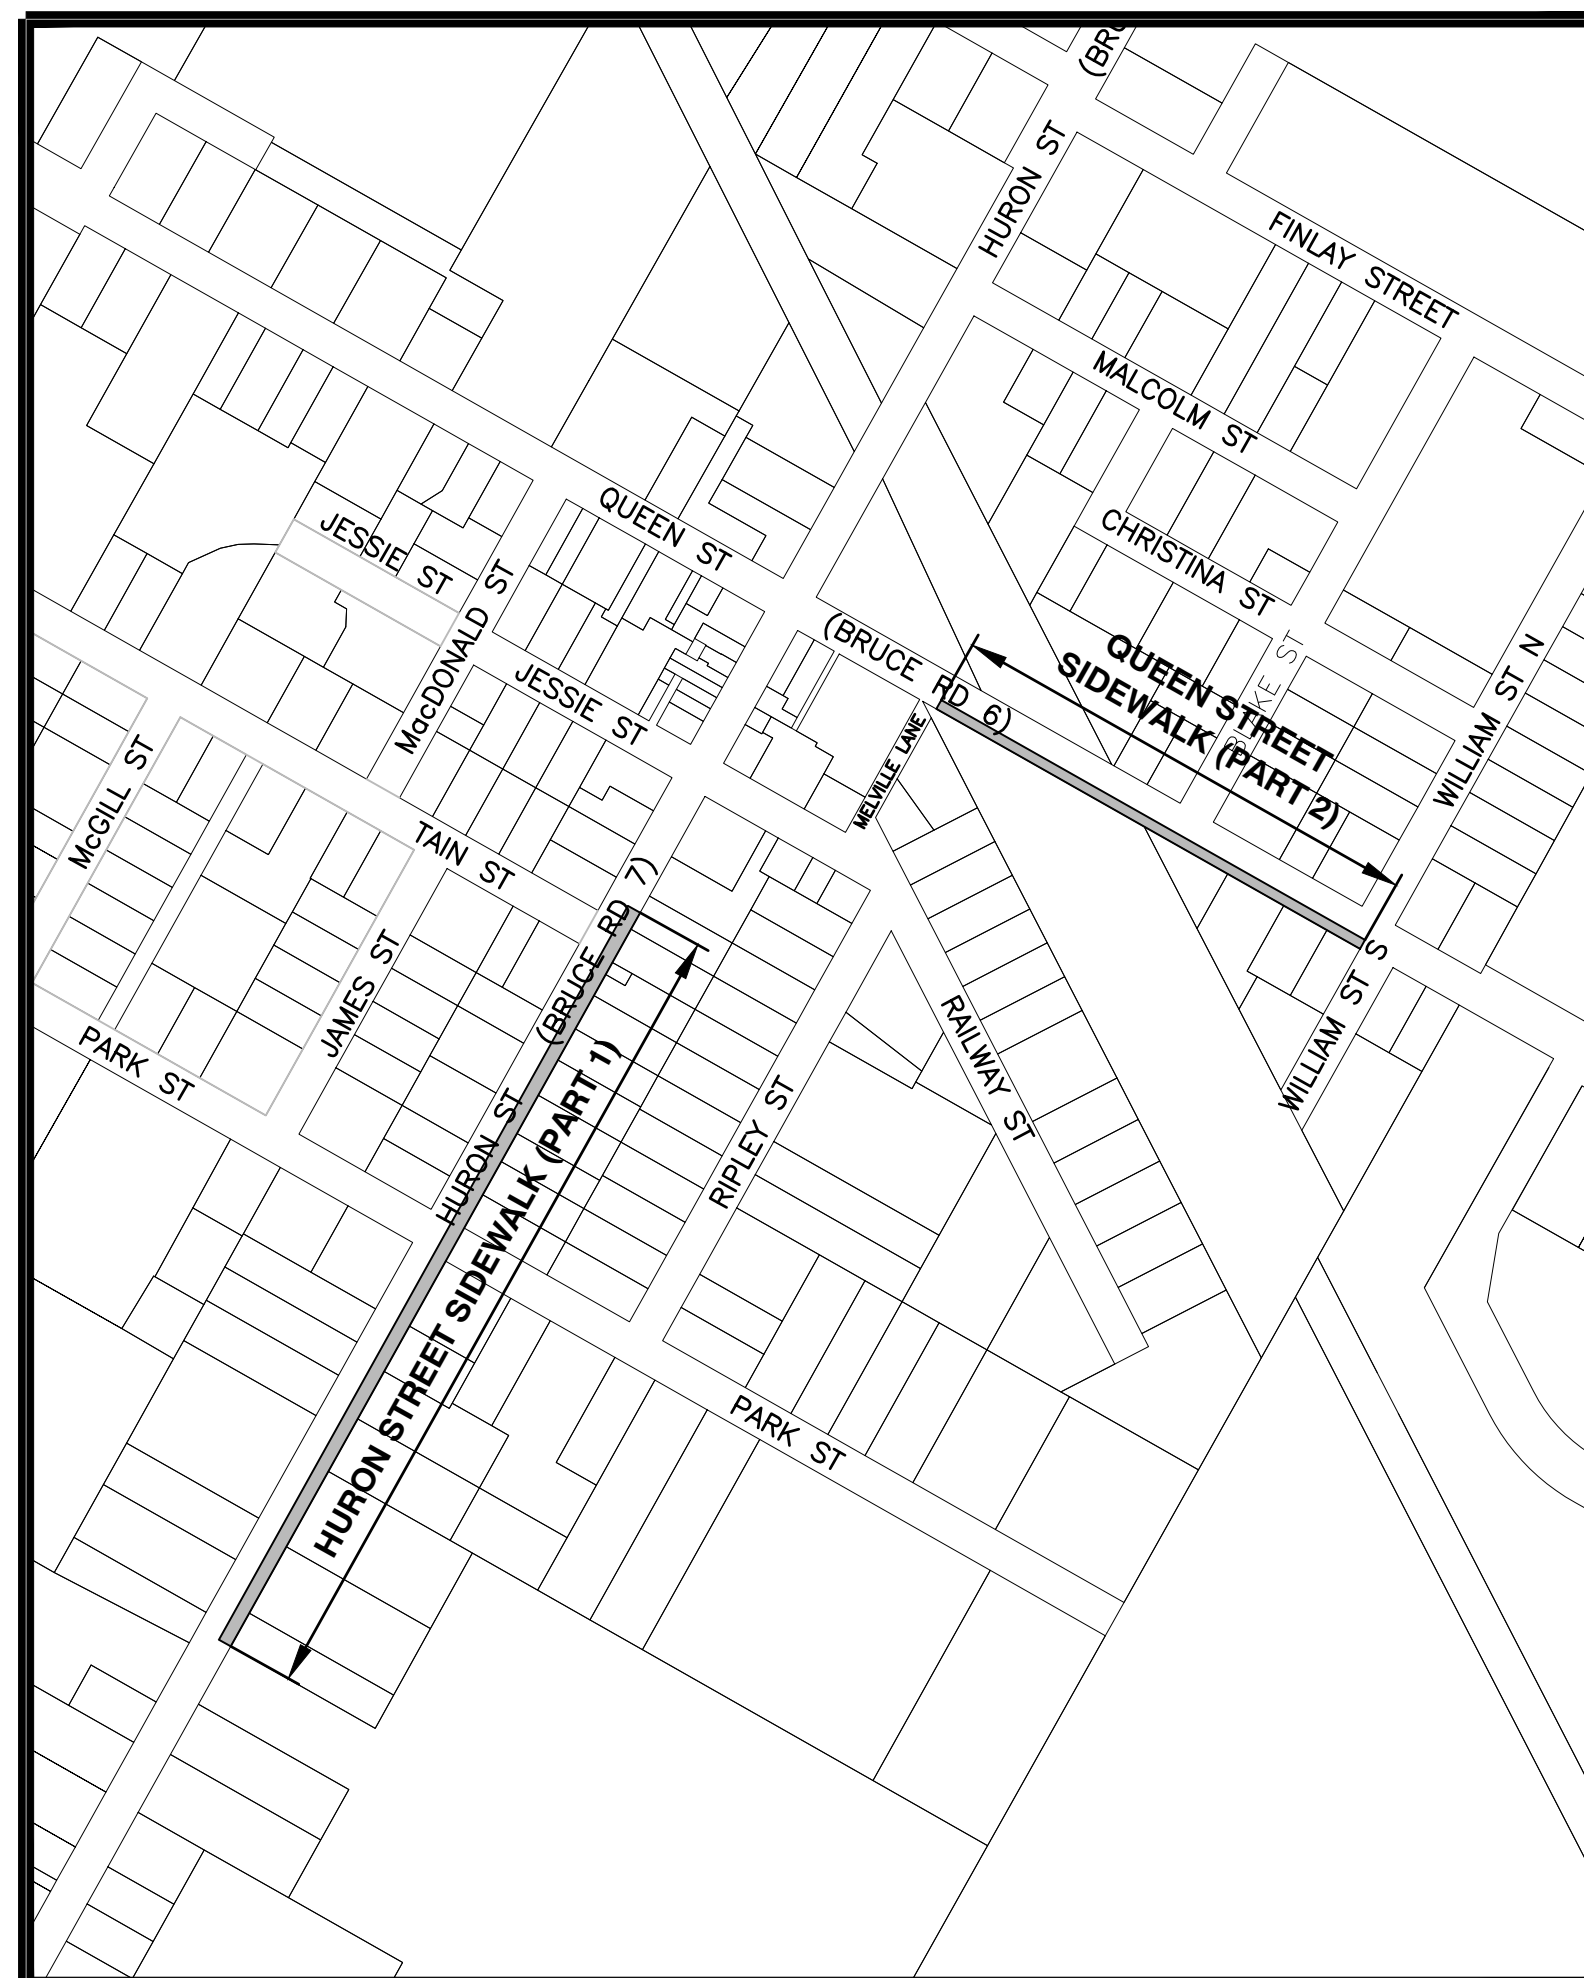


KEY PLAN

N.T.S.

PRELIMINARY


?
ISSUED FOR TENDER



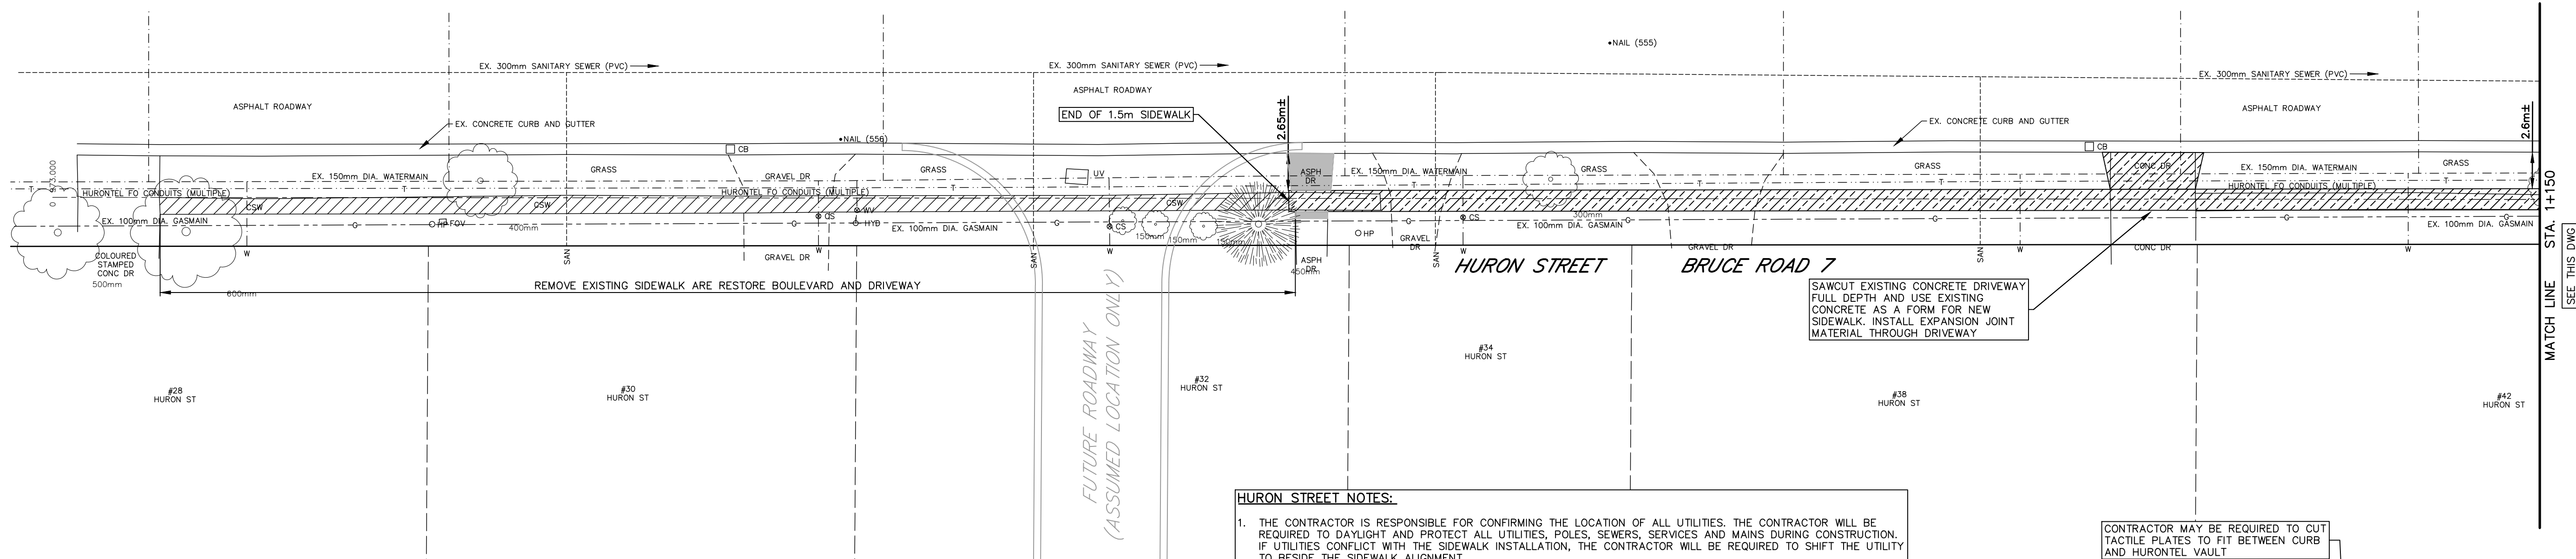


- HURON STREET NOTES:**
1. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING THE LOCATION OF ALL UTILITIES. THE CONTRACTOR WILL BE REQUIRED TO DAYLIGHT AND PROTECT ALL UTILITIES, POLES, SEWERS, SERVICES AND MAINS DURING CONSTRUCTION. IF UTILITIES CONFLICT WITH THE SIDEWALK INSTALLATION, THE CONTRACTOR WILL BE REQUIRED TO SHIFT THE UTILITY TO BESIDE THE SIDEWALK ALIGNMENT.
 2. THE CONTRACTOR SHALL MAINTAIN 2 LANES OF TRAFFIC ON THE COUNTY ROAD WITH APPROPRIATE TRAFFIC CONTROL MEASURES.
 3. SIDEWALK ALIGNMENT SHALL BE OFFSET FROM ABOVE GRADE OBSTACLES BY AT LEAST 0.2m (IE TREES, POLES, SIGNS, ETC).
 4. THE CONTRACTOR SHALL ENSURE THAT EXISTING WATER VALVES, CURB STOP BOXES AND SANITARY SERVICE CLEAN OUTS ARE KEPT OUTSIDE OF THE NEW SIDEWALK ALIGNMENT.
 5. THE CONTRACTOR SHALL TAKE CARE TO NOT DISTURB OR DAMAGE ANYTHING ON PRIVATE PROPERTY.
 6. DRIVEWAY REMOVAL LIMITS TO BE APPROVED BY THE TOWNSHIP AND CONTRACT ADMINISTRATOR PRIOR TO REMOVAL.
 7. THE CONTRACTOR SHALL NOTIFY THE COUNTY OF BRUCE ROAD 7 OR BRUCE ROAD 6 TRAFFIC. THE CONTRACTOR MUST SUBMIT THEIR TRAFFIC CONTROL PLAN TO THE COUNTY FOR REVIEW AND APPROVAL A MINIMUM OF 2 WEEKS PRIOR TO THE START OF CONSTRUCTION. COUNTY ENCROACHMENT AND TEMPORARY SIGN PERMITS WILL BE REQUIRED.

CONTRACTOR MAY BE REQUIRED TO CUT TACTILE PLATES TO FIT BETWEEN CURB AND HURONTEL VAULT

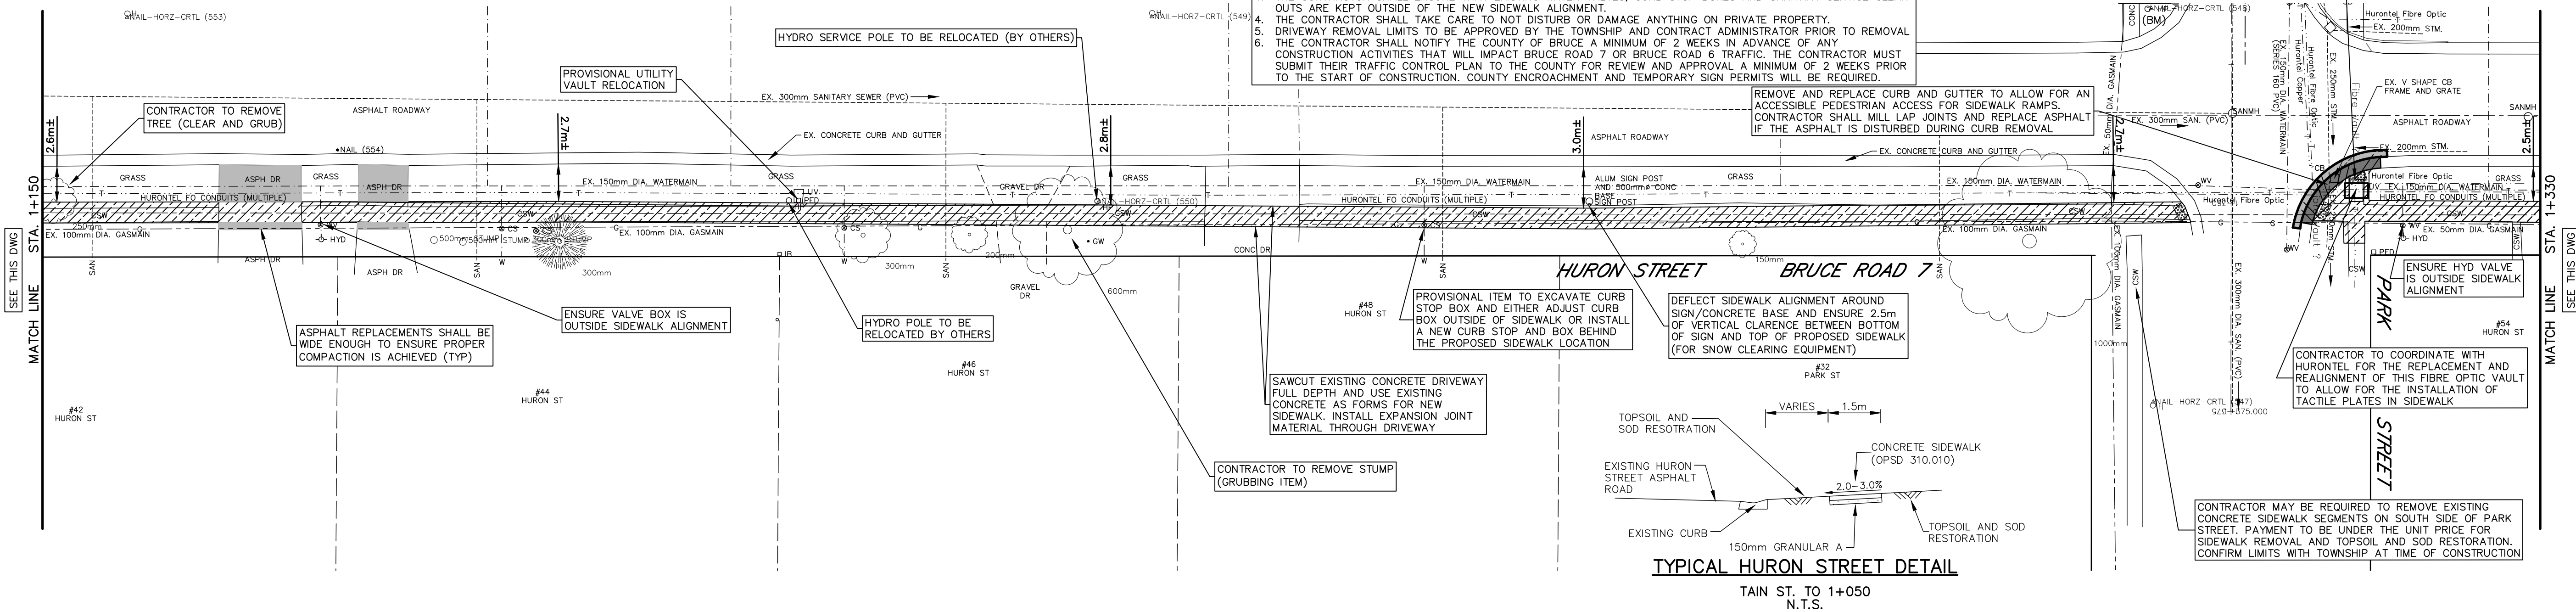

TYPICAL HURON STREET DETAIL


TAIN ST. TO 1+050
N.T.S.

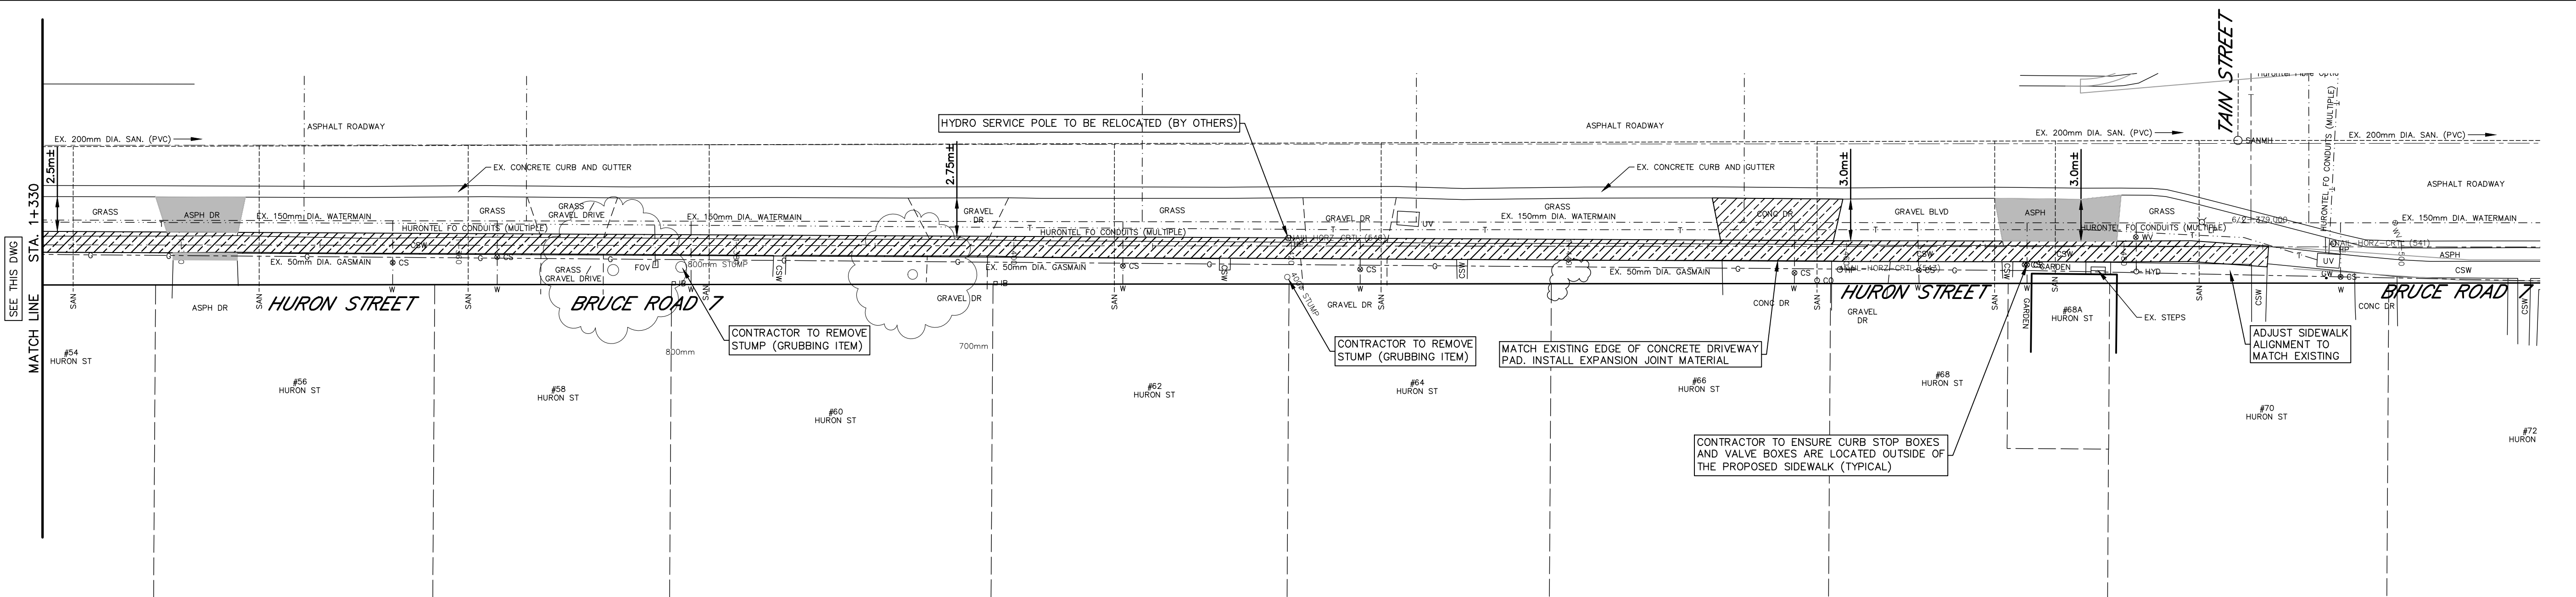

LEGEND

— SAN. or STM.	EXISTING SEWERS, SANITARY or STORM
— W —	WATERMAIN
— G —	GASMAIN
— T —	UNDERGROUND TELEPHONE
— H —	UNDERGROUND HYDRO
— TV —	UNDERGROUND T.V. CABLE
— U —	UTILITY POLES
— GRUBBING	REMOVE EXISTING CONC. SIDEWALK AND DRIVES
— PLACE CONC. SIDEWALK AND DRIVES	
— REMOVE EXISTING ASPHALT PAVT	
— PLACE HOT MIX ASPHALT (DRIVES 50mm H.C. HOT MIX MISC.)	
— REMOVE EXISTING CONC. CURB	

1:250

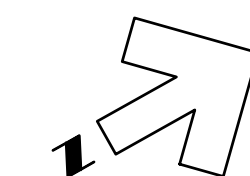

NOTE

The locations of existing underground utilities are shown in an approximate way only and have not been independently verified by the owner or its representative. The contractor shall determine the exact location of all existing utilities before commencing work and agrees to be fully responsible for any damages which might be occasioned by the contractor's failure to exactly locate and preserve any and all underground utilities.

BENCHMARK INFORMATION

BENCHMARK INFORMATION

Design By: A.T.

Checked By: R.R.R.

PRELIMINARY

No.	DATE	REVISION
1	April 18, 2023	Preliminary Design
2	Nov. 1, 2024	Issued for Client Review
3	Jan. 30, 2025	Issued for County Comment
4	?	Issued for Tender



Goderich Mount Forest Sarnia



Township of Huron-Kinloss (Ripley)


Huron Street Sidewalk PART 1

Plan from Sta. 0+980 to Sta. 1+490

Contract No. 2	Project No. 19153
Scale (24x36) 1:250	Drawing No. 1


QUEEN STREET NOTES:

1. BASE PLAN AND DETAIL IS FROM 2002 AND MAY NOT EXACTLY REFLECT CURRENT CONDITIONS. CONTRACTOR SHALL REVIEW ACTUAL SITE CONDITIONS.
2. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING THE LOCATION OF ALL UTILITIES. THE CONTRACTOR WILL BE REQUIRED TO DAYLIGHT AND PROTECT ALL UTILITIES, POLES, SEWERS, SERVICES AND MAINS DURING CONSTRUCTION. IF UTILITIES CONFLICT WITH THE SIDEWALK INSTALLATION, THE CONTRACTOR WILL BE REQUIRED TO SHIFT THE UTILITY TO BESIDE THE SIDEWALK ALIGNMENT.
3. THE CONTRACTOR SHALL MAINTAIN 2 LANES OF TRAFFIC ON THE COUNTY ROAD WITH APPROPRIATE TRAFFIC CONTROL MEASURES.
4. THE CONTRACTOR SHALL TAKE CARE TO NOT DISTURB OR DAMAGE ANYTHING ON PRIVATE PROPERTY.
5. THE CONTRACTOR SHALL ENSURE THAT EXISTING WATER VALVES, CURB STOP BOXES AND SANITARY SERVICE CLEAN OUTS ARE KEPT OUTSIDE OF THE SIDEWALK.
6. DRIVEWAY REMOVAL LIMITS TO BE APPROVED BY THE TOWNSHIP AND CONTRACT ADMINISTRATOR PRIOR TO REMOVAL.
7. THE CONTRACTOR SHALL NOTIFY THE COUNTY OF BRUCE A MINIMUM OF 2 WEEKS IN ADVANCE OF ANY CONSTRUCTION ACTIVITIES THAT WILL IMPACT BRUCE ROAD 7 OR BRUCE ROAD 6 TRAFFIC. THE CONTRACTOR MUST SUBMIT THEIR TRAFFIC CONTROL PLAN TO THE COUNTY FOR REVIEW AND APPROVAL A MINIMUM OF 2 WEEKS PRIOR TO THE START OF CONSTRUCTION.
8. THE FACE OF THE PROPOSED SIDEWALK (ROAD SIDE) SHALL BE 0.3m OFFSET FROM EXISTING UTILITY POLES. WHERE EXISTING SEPARATION BETWEEN BACK OF POLE AND FACE OF SIDEWALK IS LESS THAN 0.3m THE EXISTING OFFSET SHALL BE MAINTAINED.

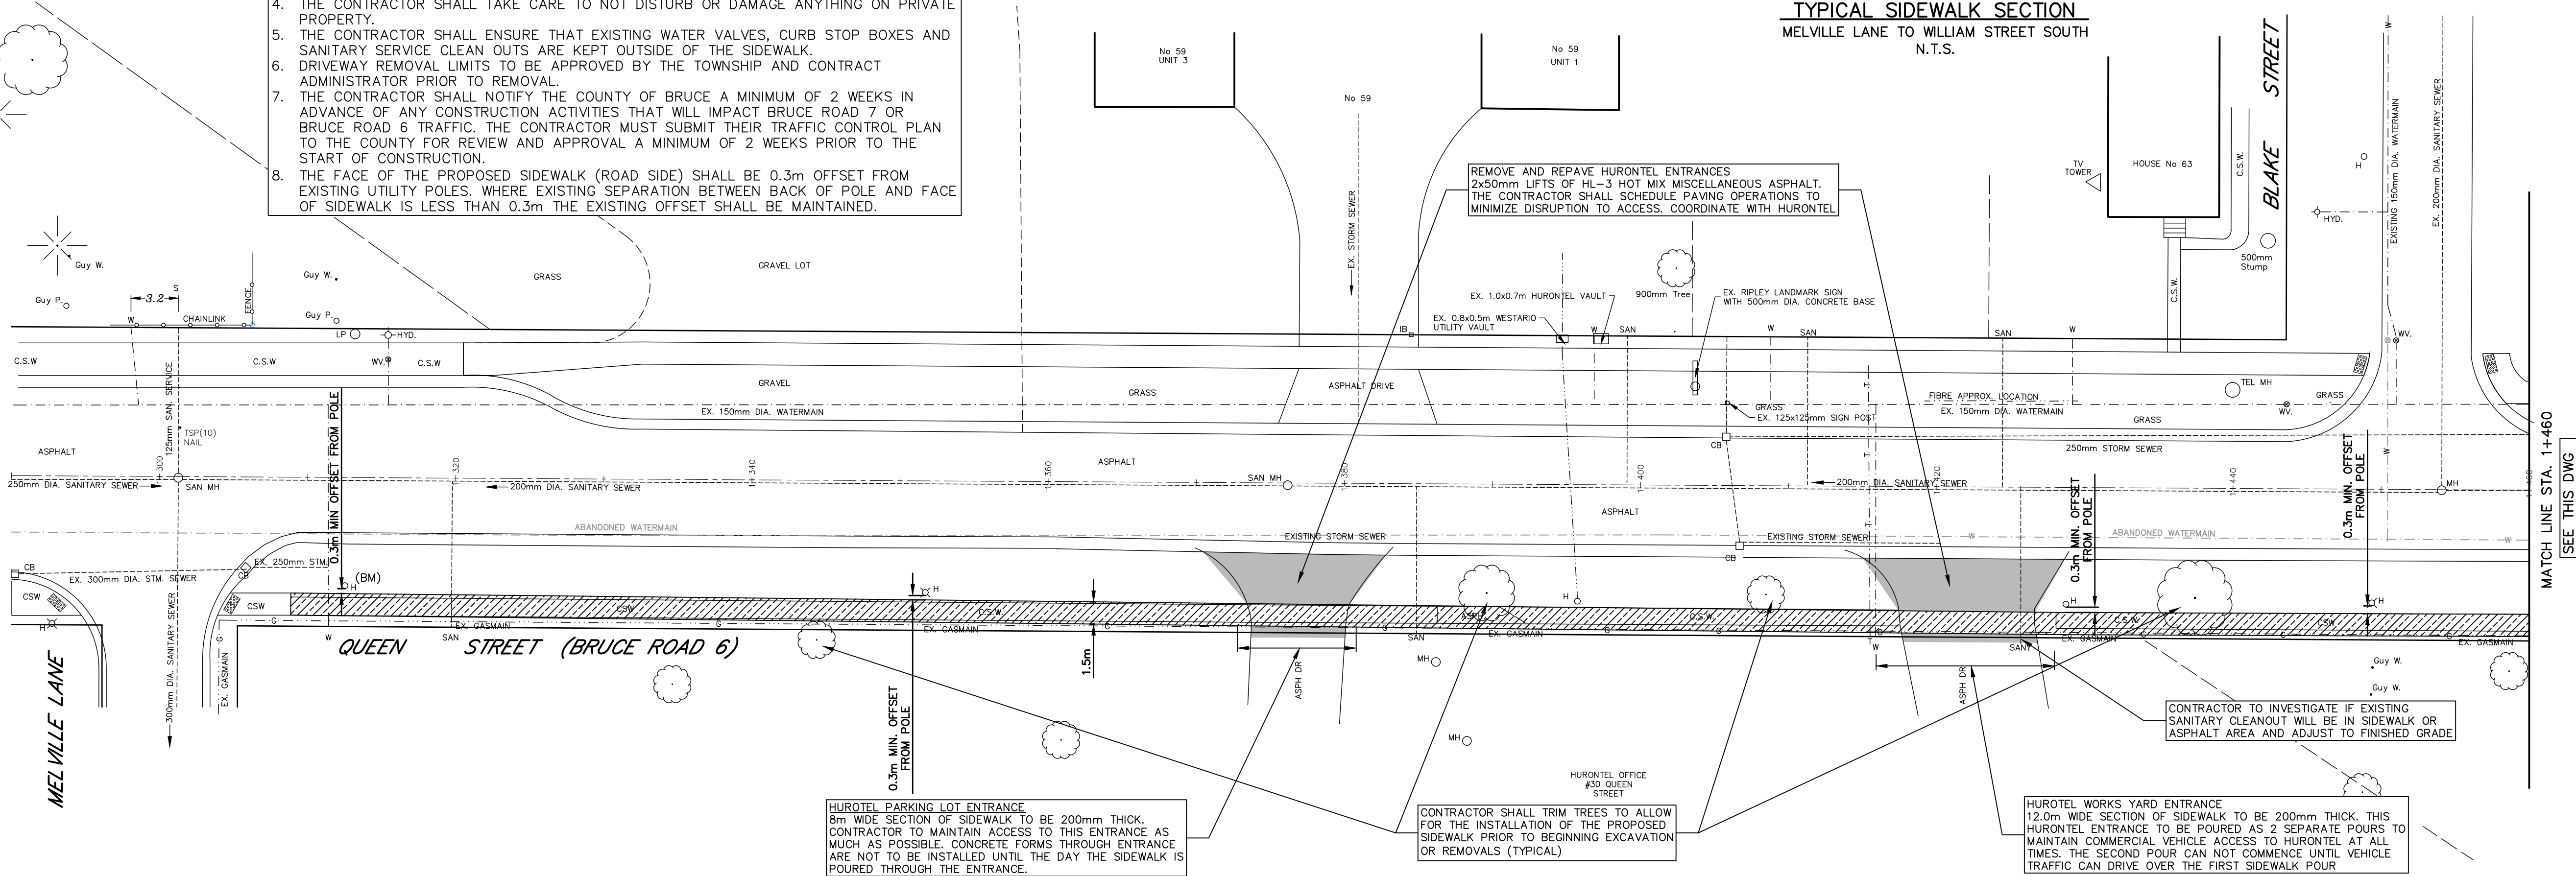

LEGEND	
— SAN. or STM.	EXISTING SEWERS, SANITARY or STORM
— W. or G.	EXISTING WATERMAIN or GASMAIN
— T. or H.	UNDERGROUND TELEPHONE or HYDRO
— TV. or C.	UNDERGROUND TV. CABLE or CABLE
— U.P.	UTILITY POLES
— CR.	CRIBBING
— EX. CONC.	REMOVE EXISTING CONC. SIDEWALK AND DRIVES
— PL.	PLACE CONCRETE SIDEWALK AND DRIVES
— H.M.	PLACE HOT MIX ASPHALT (DRIVES 50mm HL-3 HOT MIX MSC.)
— EX. CURB	REMOVE EXISTING CONC. CURB

1:250

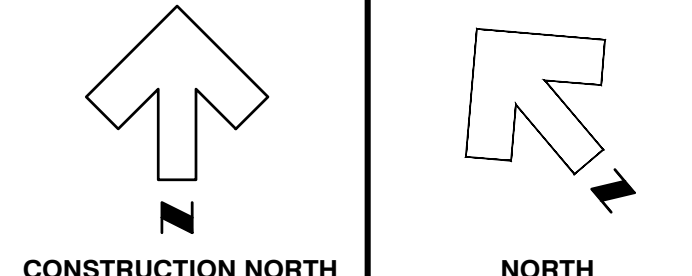

NOTE
The locations of existing underground utilities have not been independently verified by the owner or its representative. The contractor shall determine the exact location of all existing utilities before commencing work and agrees to be fully responsible for any damages which might be occasioned by the contractor's failure to exactly locate and preserve any and all underground utilities.

Design By: R.R.R. Checked By: K.D.L.

PRELIMINARY

No.	DATE	REVISION
1	May 28, 2024	For Client Review
2	June 18, 2024	Updated sidewalk location
3	Nov. 1, 2024	Issued for Client Review
4	Jan. 30, 2025	Issued for County Comment
5	?	Issued for Tender



Goderich Mount Forest Sarnia



Township of Huron-Kinloss (Ripley)
Queen Street Sidewalk
PART 2
Plan of Proposed Sidewalks
on the south side of Queen Street

Contract No. 2	Project No. 19153
Scale (24x36) 1 : 250	Drawing No. 2